

# E-Z-GO - 1994 & Up, Medalist/TXT

## D394 - "The BEAST" Series Motor/Controller Options

### Terrain Color Codes




**D394 - The Beast**, 36-48 volt, Series 19 spline, for E-Z-GO, 1988 & up

This motor will fit 1988 & up E-Z-GO 19 spline differentials. Older resister type cars must be converted to use a solid state controller. Throttle and controller must be compatible. Generally E-Z-GO throttles thru mid 1994 are 0-5K, mid 1994 & later are ITS.



- 496     400 amp, 36-48 volt Alltrax, ITS
- 497 -   500 amp, 36-48 volt Alltrax, ITS
- 459 -   650 amp, 36-48 volt Alltrax, ITS



Must use 400 amp controller or higher with the Beast



### Application: Torque\Lifted Cars


4-pass kit or utility box

- 36V, stock gears & tires, up to 15 mph
- 36V, stock gears & 22" tires, up to 19 mph
- 48V, stock gears & tires, up to 18 mph
- 48V, stock gears & 22" tires, up to 22 mph


- 585   500 amp, 36-48 volt GE   \* Δ Yellow Green
- 586   700 amp, 36-48 volt GE   \* Δ Yellow Green Orange

ITS E-Z-GO w/584 converter

- 584   throttle converter  
Use with 585 & 586 to change 5K - 0 to ITS throttle

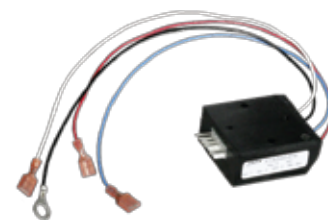

- 1142 H.D. 36 Volt Solenoid
- 1168 H.D. 48 Volt Solenoid
- 5799 H.D. F & R Switch
- 1248 4ga Premium Cable Set

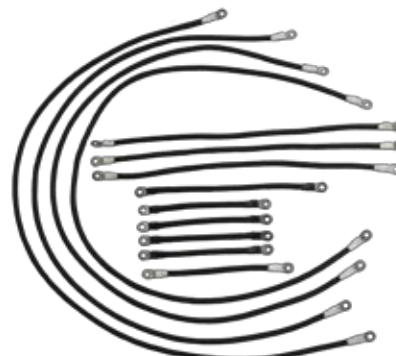

\* For maximum performance, safety, and durability, 4 gauge cables throughout the car, H.D. solenoid & F&R switch are required  
 Δ Use on car with four passenger kit or utility box