

E-Z-GO - 1994 & Up, Medalist/TXT

D398 - "The Raptor" Series Motor/Controller Options

Terrain Color Codes




D398 - Raptor, 36-48 volt, Series 19 spline for E-Z-GO, 1988 & up,

This motor will fit 1988 & up E-Z-GO 19 spline differentials. Older resistor type cars must be converted to use a solid state controller. Throttle and controller must be compatible. Generally E-Z-GO throttles thru mid 1994 are 0-5K, mid 1994 & later are ITS.



- 496 - 400 amp, 36-48 volt Alltrax, ITS
- 497 - 500 amp, 36-48 volt Alltrax, ITS
- 459 - 650 amp, 36-48 volt Alltrax, ITS





Application: Speed\Non-Lifted Cars

Up to 25 mph on 36 volts,
with stock gears & tires.



- 585 - 500 amp, 36-48 volt GE
- 586 - 700 amp, 36-48 volt GE

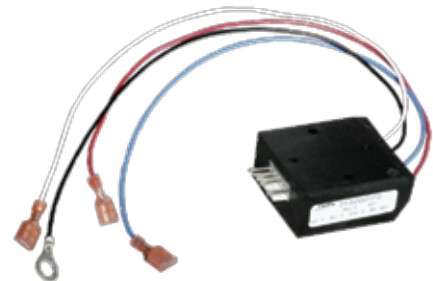

ITS E-Z-GO w/584 converter

- 584 - throttle converter
Use with 585 & 586 to change 5K - 0 to ITS throttle



- 1142 - H.D. 36 Volt Solenoid
- 1168 - H.D. 48 Volt Solenoid
- 5799 - H.D. F & R Switch
- 1248 - 4ga Premium Cable Set



* For maximum performance, safety, and durability, 4 gauge cables throughout the car, H.D. solenoid & F&R switch are required
 Δ Use on car with four passenger kit or utility box